api technologies corp. › WEINSCHEL

Fixed Coaxial Attenuators

Model 276

High Reliability, N Connectors

Designed to meet requirements of MIL-DTL-3933, CLASS IV, N/S

dc to 18.0 GHz
25 Watts

NEW

Features

- **Rugged injection molded connectors.**
- **Screened (Model 276S) and Non-screened (Model 276N) designs available.**
- **Available in 3, 6, 10, 20 & 30 dB.**
- **Test Data supplied at additional cost as follows:**

  Non-screened (N): Swept data plots of Attenuation and SWR across the frequency band.

  Screened (S): Swept data plots of Attenuation and SWR across the frequency band. Standard data package includes film, lot record performace showing pass/fail quantities for all tests and test reports as applicable.

Specifications

NOMINAL IMPEDANCE: 50 Ω

FREQUENCY RANGE: dc to 18.0 GHz

MAXIMUM DEVIATION OVER FREQUENCY:			
Nominal ATTN (dB)	dc-4 GHz	4-8 GHz	8-18 GHz
3, 6, 10, 20	± 0.30	± 0.60	± 1.00
30	± 0.60	± 0.75	± 1.00

MAXIMUM SWR:	
Frequency (GHz)	SWR
dc - 4	1.15
4 - 8	1.20
8 -12	1.25
12 - 18	1.40

POWER RATING (mounted horizontally): 25 watts **average (bi-directional)** to 25°C ambient temperature, derated linearly to 2.5 watts @ 125°C.

3, 6 dB: 1 kilowatt **peak** (5 µsec pulse width; 0.05% duty cycle), 10, 20 30 dB: 2 kilowatt **peak** (5 µsec pulse width; 0.05% duty cycle).

POWER COEFFICIENT: <0.0006 dB/dB/watt

TEMPERATURE COEFFICIENT: <0.0004 dB/dB/°C

TEMPERATURE RANGE: -55°C to 125°C

CONNECTORS: Type N connectors per MIL-STD-348 interface dimensions - mate nondestructively with MIL-C-39012 connectors.

Options	Description
3	Type N Female
4	Type N Male

CONSTRUCTION: Black, finned aluminum body, stainless steel connectors with gold plated beryllium copper contacts.

WEIGHT: 110 g (4 oz.) maximum

PHYSICAL DIMENSIONS:

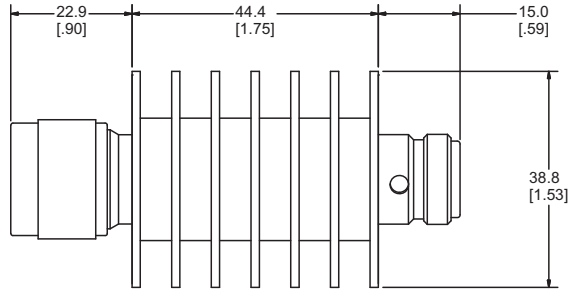

Connector	DIM A
N Male	24.1 (0.95)
N Female	19.0 (0.75)

NOTE: All dimensions are given in mm (inches) and are maximum, unless otherwise specified.

Screening

Units are screened as follows:

"N" versions:
- SWR
- Attenuation
- Peak Power

"S" versions:
- Thermal Shock
- Monitored Thermal Cycle (MTC)
- Attenuation
- Conditioning
- Peak Power
- Attenuation
- SWR
- Radiographics

MODEL NUMBER DESCRIPTION:

Example:

276N - XX

- 276N: Basic Model Number
- N = Non-screened, S = Screened
- XX: Attenuation Value (dB)

5305 Spectrum Drive, Frederick, MD 21703-7362 • TEL: 301-846-9222, 800-638-2048 • Fax: 301-846-9116
web: www.weinschel.apitech.com • email: weinschel-sales@apitech.com

Revision Date: 08/02/2016