



technologies corp.
 > WEINSCHEL

Model 279

Medium Power, SMK Connectors

Fixed Coaxial Attenuators

dc to 40.0 GHz

10 Watts



Features

- /// Compact Construction - Lowest size/power ratio.
- /// Precision injection molded connectors.
- /// Designed to meet environmental requirements of MIL-DTL-3933.
- /// RoHS Compliant

Specifications

NOMINAL IMPEDANCE: 50 Ω

FREQUENCY RANGE: dc to 40.0 GHz

MAXIMUM DEVIATION OVER FREQUENCY:

Nominal ATTN (dB)	Deviation (dB)
6, 10, 20, 30	± 1.5

MAXIMUM SWR:

Frequency (GHz)	SWR
DC - 18	1.20
18 - 40	1.35

POWER RATING (mounted horizontally): 10 watts **average (unidirectional)** to 25°C ambient temperature, derated linearly to 2 Watts @ 125°C. 200 watts **peak** (5 μsec pulse width; 5% duty cycle). Maximum power into output port is 5 Watts.

POWER COEFFICIENT: <0.002 dB/dB/watt

TEMPERATURE COEFFICIENT: <0.0004 dB/dB/°C

TEMPERATURE RANGE: -55 °C to 125 °C

TEST DATA: Swept data plots of attenuation and SWR from 50 MHz to 40 GHz.


CONNECTORS: SMK (2.92mm) Male/Female connectors - mate nondestructively with SMA per MIL-C-39012, 3.5mm and other 2.92mm connectors.

Connector Options	Type/Description
1	SMK (2.92mm), Female
2	SMK (2.92mm), Male

CONSTRUCTION: Black, finned aluminum body, gold plated beryllium copper contacts.

WEIGHT: 200 g (8.0 oz.) maximum

PHYSICAL DIMENSIONS:

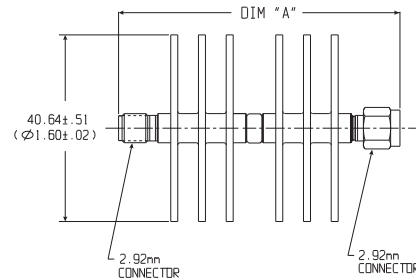

Dash No.	Connector Type	DIM A
11	SMKFemale/Female	60.5 mm (2.38")
12	SMK Female/Male	63.5 mm (2.50")
21	SMK Male/Female	63.5 mm (2.50")
22	SMK Male/Male	66.0 mm (2.60")

NOTE: All dimensions are given in mm (inches) and are nominal, unless otherwise specified.

MODEL NUMBER DESCRIPTION:

Example:

